


ZWICK
VALVES NA LLC 

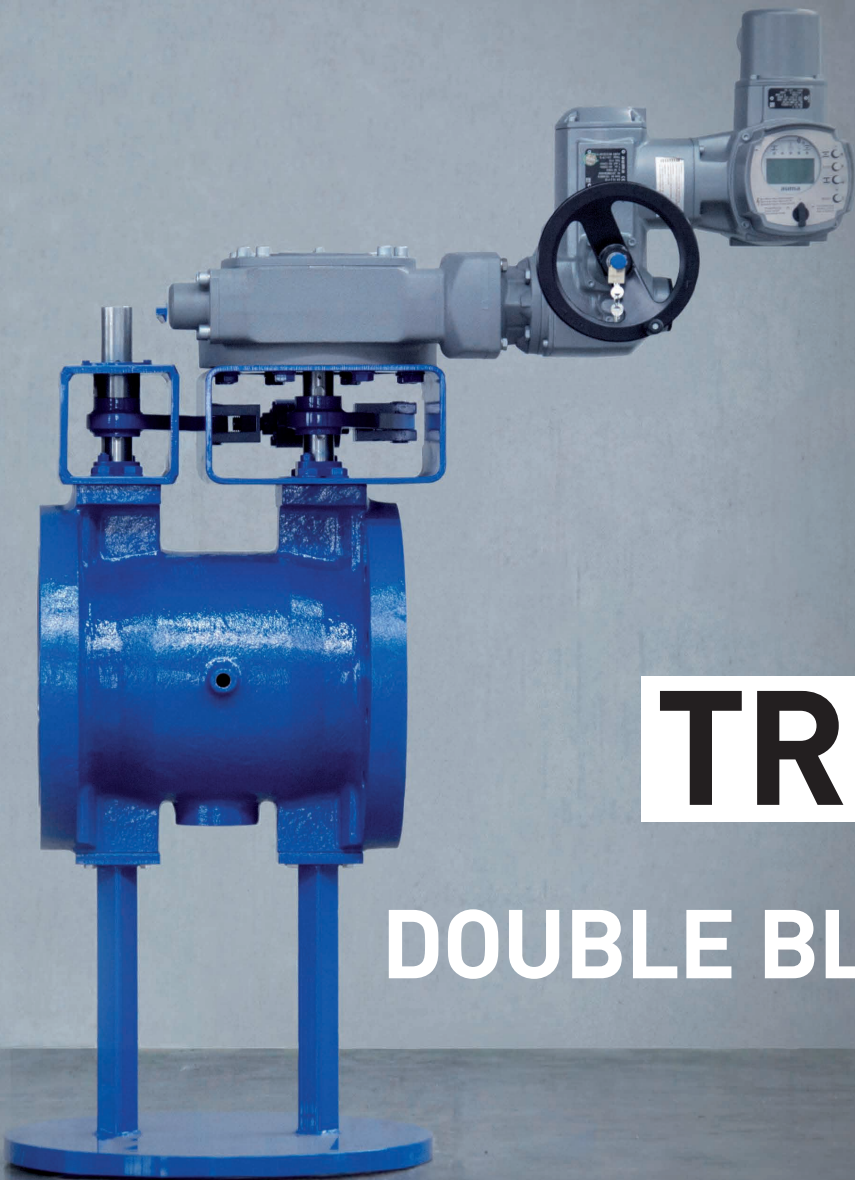

TRI-BLOCK


DOUBLE BLOCK & BLEED

100 % Zero Leakage


HIGH STANDARD VALVES FOR NON-STANDARD CONDITIONS.

TRI-BLOCK

- DN 80 - 1200 / 3" - 48"
- PN 10 - 40 / ANSI 150 - 300
- 2 Bleed port integrated
- Zero Leakage for liquids & gases
API 898 and EN 12266-1 class A
- -50°C - +425°C
- Fire Safe
- TA Luft II
- single or double operated

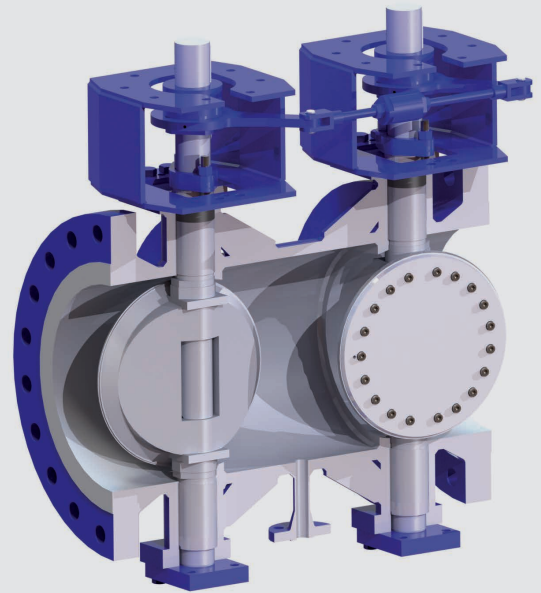

- double isolation
- gate valve F - F
- metal seated
- BS 6364 up to Zero Leakage

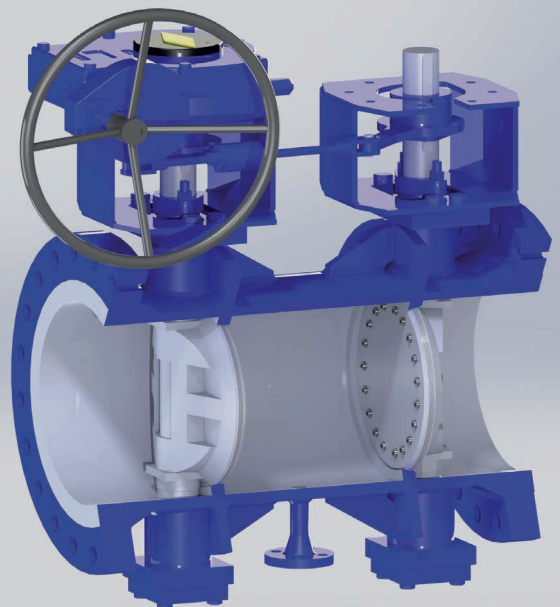

ZWICK
VALVES NA LLC

2552 South Battleground Road
Deer Park, Texas 77536 USA
TEL +1-281-478-4701
FAX +1-281-478-4728
MAIL info@zwick-valves.com

WWW.ZWICK-VALVES.COM